



# CorePro LEDluster

CorePro LEDluster 2.7-25W E14 827 P48 FR

The frosted CorePro LEDluster is designed for retrofit replacement of incandescent lamps. It is compatible with fixtures with an E27 or E14 holder. LED lamps deliver huge energy savings and minimize maintenance cost.

## Product data

### • General Characteristics

|                        |          |
|------------------------|----------|
| Cap-Base               | E14      |
| Bulb                   | P48      |
| Bulb Finish            | Frosted  |
| Rated Lifetime (hours) | 15000 hr |
| Nominal Lifetime hours | 15000 hr |

### • Light Technical Characteristics

|                              |                    |
|------------------------------|--------------------|
| Color Code                   | 827                |
| Color Designation (text)     | Warm White         |
| Correlated Color Temperature | 2700 K             |
| Luminous Flux                | 250 Lm             |
| Color rendering index        | 80                 |
| Luminous Efficacy Lamp       | 92.59 Lm/W         |
| Color Temperature            | 2700 K [CCT 2700K] |
| Rated Luminous Flux          | 250 Lm             |
| LLMF - end nominal lifetime  | 70 %               |
| Colour consistency           | 6 steps            |

### • Electrical Characteristics

|                    |           |
|--------------------|-----------|
| Wattage            | 2.7 W     |
| Wattage Technical  | 2.7 W     |
| Voltage            | 220-240 V |
| Line Frequency     | 50 Hz     |
| Power Factor       | 0.4 -     |
| Lamp Current mA    | 30 mA     |
| Dimmable           | No        |
| Wattage Equivalent | 25 W      |

|                              |       |
|------------------------------|-------|
| Rated Wattage                | 2.7 W |
| Starting Time                | 0.5 s |
| Suitable for accent lighting | No    |

### • Temperature Characteristics

|                |      |
|----------------|------|
| T-case maximum | 85 C |
|----------------|------|

### • Environmental characteristics

|                               |     |
|-------------------------------|-----|
| Energy Efficiency Label (EEL) | A++ |
|-------------------------------|-----|

### • Measuring Conditions

|                 |        |
|-----------------|--------|
| Switching cycle | 50000X |
|-----------------|--------|

### • Product Dimensions

|                  |       |
|------------------|-------|
| Overall Length C | 95 mm |
| Diameter D       | 48 mm |

### • Product Data

|                         |  |
|-------------------------|--|
| Order code              | 929000274202                             |
| Full product code       | 929000274202                             |
| Full product name       | CorePro LEDluster 2.7-25W E14 827 P48 FR |
| Order product name      | CorePro LEDluster 2.7-25W E14 827 P48 FR |
| Pieces per pack         | 1  |
| Packing configuration   | 10                                       |
| Packs per outerbox      | 10                                       |
| Bar code on pack - EAN1 | 8718291743552                            |




# PHILIPS

# CorePro LEDluster

Bar code on  
outerbox - EAN3 8718291743569  
Logistic code(s) -  
12NC 929000274202


Net weight per piece 0.030 kg

## Dimensional drawing

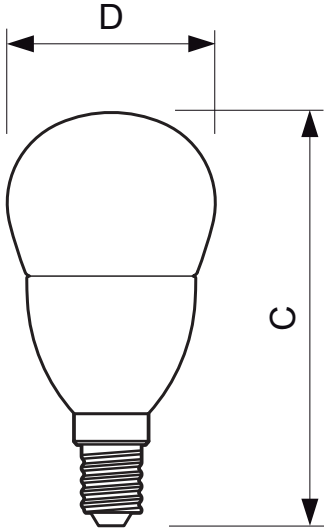


### CorePro LEDluster 2.7-25W E14 827 P48 FR

| Product                       | C (Norm) | D (Norm) |
|-------------------------------|----------|----------|
| LED ND 2.7-25W E14 827 P48 FR | 95       | 48       |



E14

## Photometric data

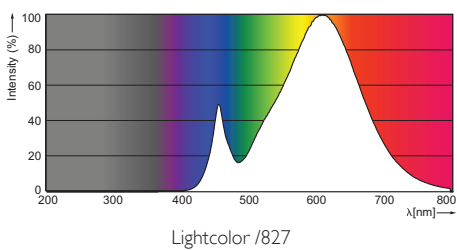

© 2014 Koninklijke Philips N.V. (Royal Philips)  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2014, July 15  
data subject to change