



Actinic BL TL/TL-D/T5

Actinic BL TL-DK 36W/10 1SL

Tubular low-pressure mercury vapour fluorescent lamps

Product data

• General Characteristics

Cap-Base	G13 [G13]
Bulb	T26
Main Application	Reprography
Useful Life	5000 hr
Life to 50% failures	9000 hr
EM	

• Electrical Characteristics

Rated Lamp Wattage	36 W
Technical Lamp	36 W
Power	
Lamp Voltage	50 V
Lamp Current	0.865 A

• Environmental Characteristics

Mercury (Hg) Content	8.0 mg
----------------------	--------

• Light Technical Characteristics

Colour Code	10
Colour Designation	Actinic
Chromaticity Coordinate X	225 -
Chromaticity Coordinate Y	230 -
Depreciation 5000 hours	30 %
Depreciation 2000 hours	20 %

• UV-related Characteristics

UV-A Radiation 100hr (IEC)	8.8 W
UV-B/UV-A (IEC)	0.2 %

• Product Dimensions

Base Face to Base Face A	589.8 (max) mm
Insertion Length B	594.5 (min), 596.9 (max) mm
Overall Length C	604 (max) mm
Diameter D	28 (max) mm


• Product Data

Order code	860832 00
Full product code	872790086083200
Full product name	Actinic BL TL-DK 36W/10 1SL
Order product name	Actinic BL TL-DK 36W/10 1SL/25
Pieces per pack	1
Packing configuration	25
Packs per outerbox	25
Bar code on pack - EAN1	8727900860832
Bar code on outerbox - EAN3	8727900860849
Logistic code(s) - 12NC	928019701003
Net weight per piece	68.900 gr


PHILIPS

sense and simplicity


Dimensional drawing



Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL-DK 36W/10	589.8	594.5	596.9	604	28



Photometric data

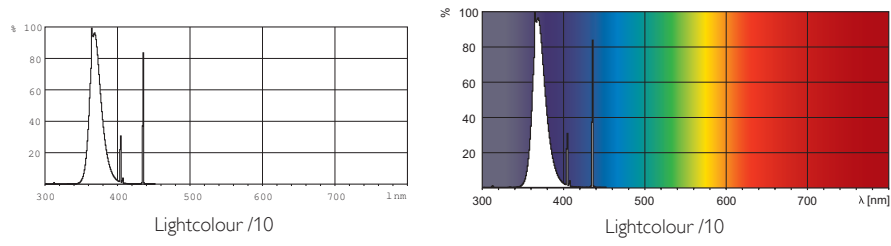

© 2011 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2011, May 18
data subject to change