



MASTER GLASS LED candles and lusters



MAS LEDCandleDT3.4-40W E27 927 B35CL G

Featuring a classic heritage design, Classic filament LED Lamps combine the familiar shapes of incandescent candles and lusters with the benefits of the long-lasting LED technology. It is an idea product to provide customers with cozy atmosphere. The MASTER LED candles and lusters can be dimmed for different lumen level and also for the different color temperature. MASTER Glass Led Bulbs deliver significant energy savings, offering even 30% more compared to normal LED and provides excellent quality of light. By offering a lifetime of 25,000 hours it reduces maintenance costs.

Product data

General Information		
Cap-Base	E27 [E27]	
Nominal lifetime	25,000 hour(s)	
Switching Cycle	20,000	
Lighting Technology	LED	
Flux measurement reference	Sphere	
CE mark	Yes	
EU RoHS compliant	Yes	
Light Technical		
Color Code	922-927 [CCT of 2200K-2700K]	
Luminous Flux	470 lumen	
Color Designation	Warm Glow(WG)	
Correlated Color Temperature (Nom)	2200 2700 K	
Luminous Efficacy (rated) (Nom)	138 lm/W	
Color Consistency	<6	
Color rendering index (CRI)	90	

LLMF At End Of Nominal Lifetime (Nom)	70 %
Flickering value (PstLM)	0.9
Stroboscopic effect value (SVM)	0.4
Photobiological safety according to EN	RG0
62471	
Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	3.4 W
Lamp Current (Nom)	24 mA
Wattage Equivalent	40 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.6
Voltage (Nom)	220-240 V

Datasheet, 2023, April 16 data subject to change

MASTER GLASS LED candles and lusters


Temperature	
Ambient temperature range	-20 °C to 45 °C
T-Case Maximum (Nom)	70 °C
Controls and Dimming	
Dimmable	Only with specific dimmers
Mechanical and Housing	
Bulb Finish	Clear
Bulb Material	Glass
Bulb Shape	B35 [B 35mm]
Approval and Application	
Energy Efficiency Class	D
Energy Consumption kWh/1000 h	4 kWh
EPREL Registration Number	1109140
EyeComfort	Yes

Product Data		
Full product code	871951444943500	
Order product name	MAS LEDCandleDT3.4-40W E27 927	
	B35CL G	
Order code	929003012382	
Local order code	MLDCA3.4E27927C	
Numerator - Quantity Per Pack	1	
Numerator - Packs per outer box	10	
Material Nr. (12NC)	929003012382	
Full product name	MAS LEDCandleDT3.4-40W E27 927	
	B35CL G	
EAN/UPC - Case	8719514449442	
Local code description	MLDCA3.4E27927C	
EAN/UPC - Product/Case	8719514449435	


Dimensional drawing

Product	D	С
MAS LEDCandleDT3.4-40W E27 927 B35CL G	35 mm	95 mm

Photometric data




General uniform lighting - MAS LEDCandleDT3.4-40W E27 927 B35CL G



Light Distribution Diagram - MAS LEDCandleDT3.4-40W E27 927 B35CL G


MASTER GLASS LED candles and lusters


Photometric data

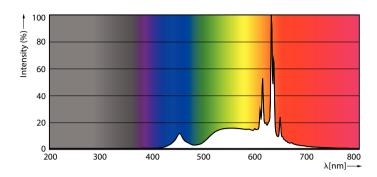

Spectral Power Distribution Colour - MAS LEDCandleDT3.4-40W E27 927 B35CL G

Lifetime

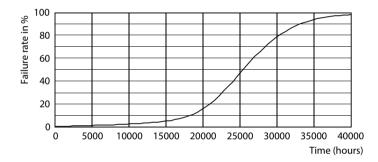



Life Expectancy Diagram - MAS LEDCandleDT3.4-40W E27 927 B35CL G

Lumen Maintenance Diagram - MAS LEDCandleDT3.4-40W E27 927 B35CL G



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.